


Ever-Stone

SLAB & TILE *collection*



CANCOS
TILE & STONE

Ever~Stone
CALACATTA
GOLD

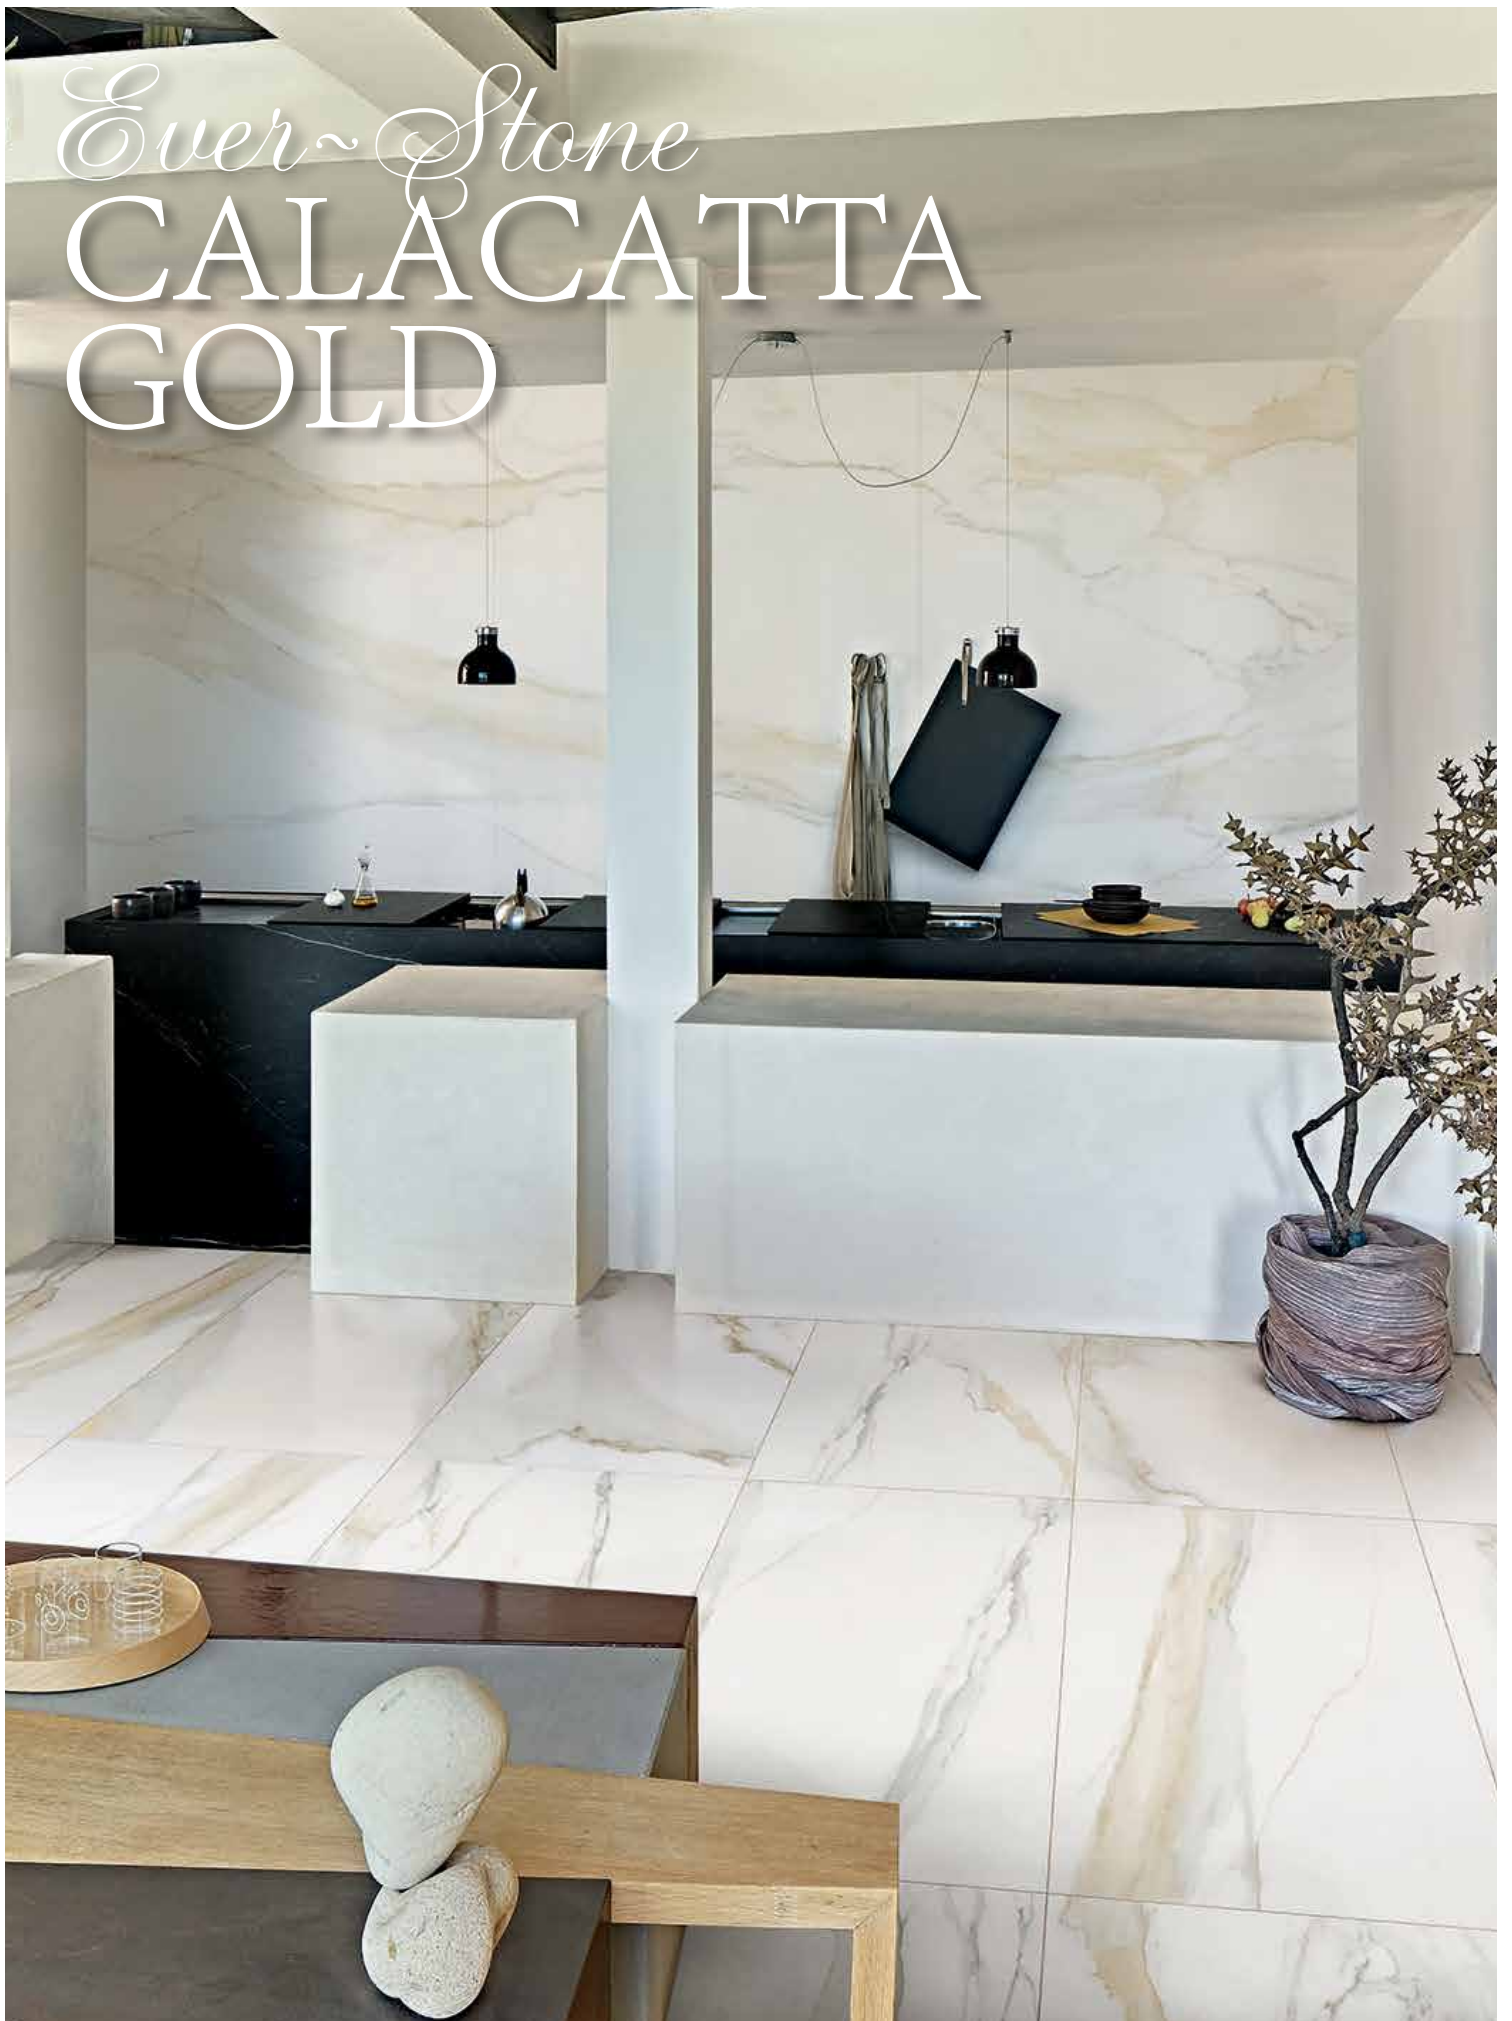

Ever~Stone CALACATTA GOLD

24"x48" (60x120cm) Tiles

6mm thickness | Polished + Matte Finishes | Rectified Edge | 20 faces*



*faces are shown for visual variety. they are not intended for individual selection.

MAIEVCG2448 (M)
MAIEVCG2448L (P)

Ever~Stone CALACATTA GOLD

48"x96" (120x240cm) Slabs


6mm thickness | Polished + Matte Finishes | Rectified Edge | 6 faces*



*faces are shown for visual variety. they are not intended for individual selection.

HRREVCG1/4 (M)
HRREVCG1/4L (P)


Ever~Stone
ILLUSION

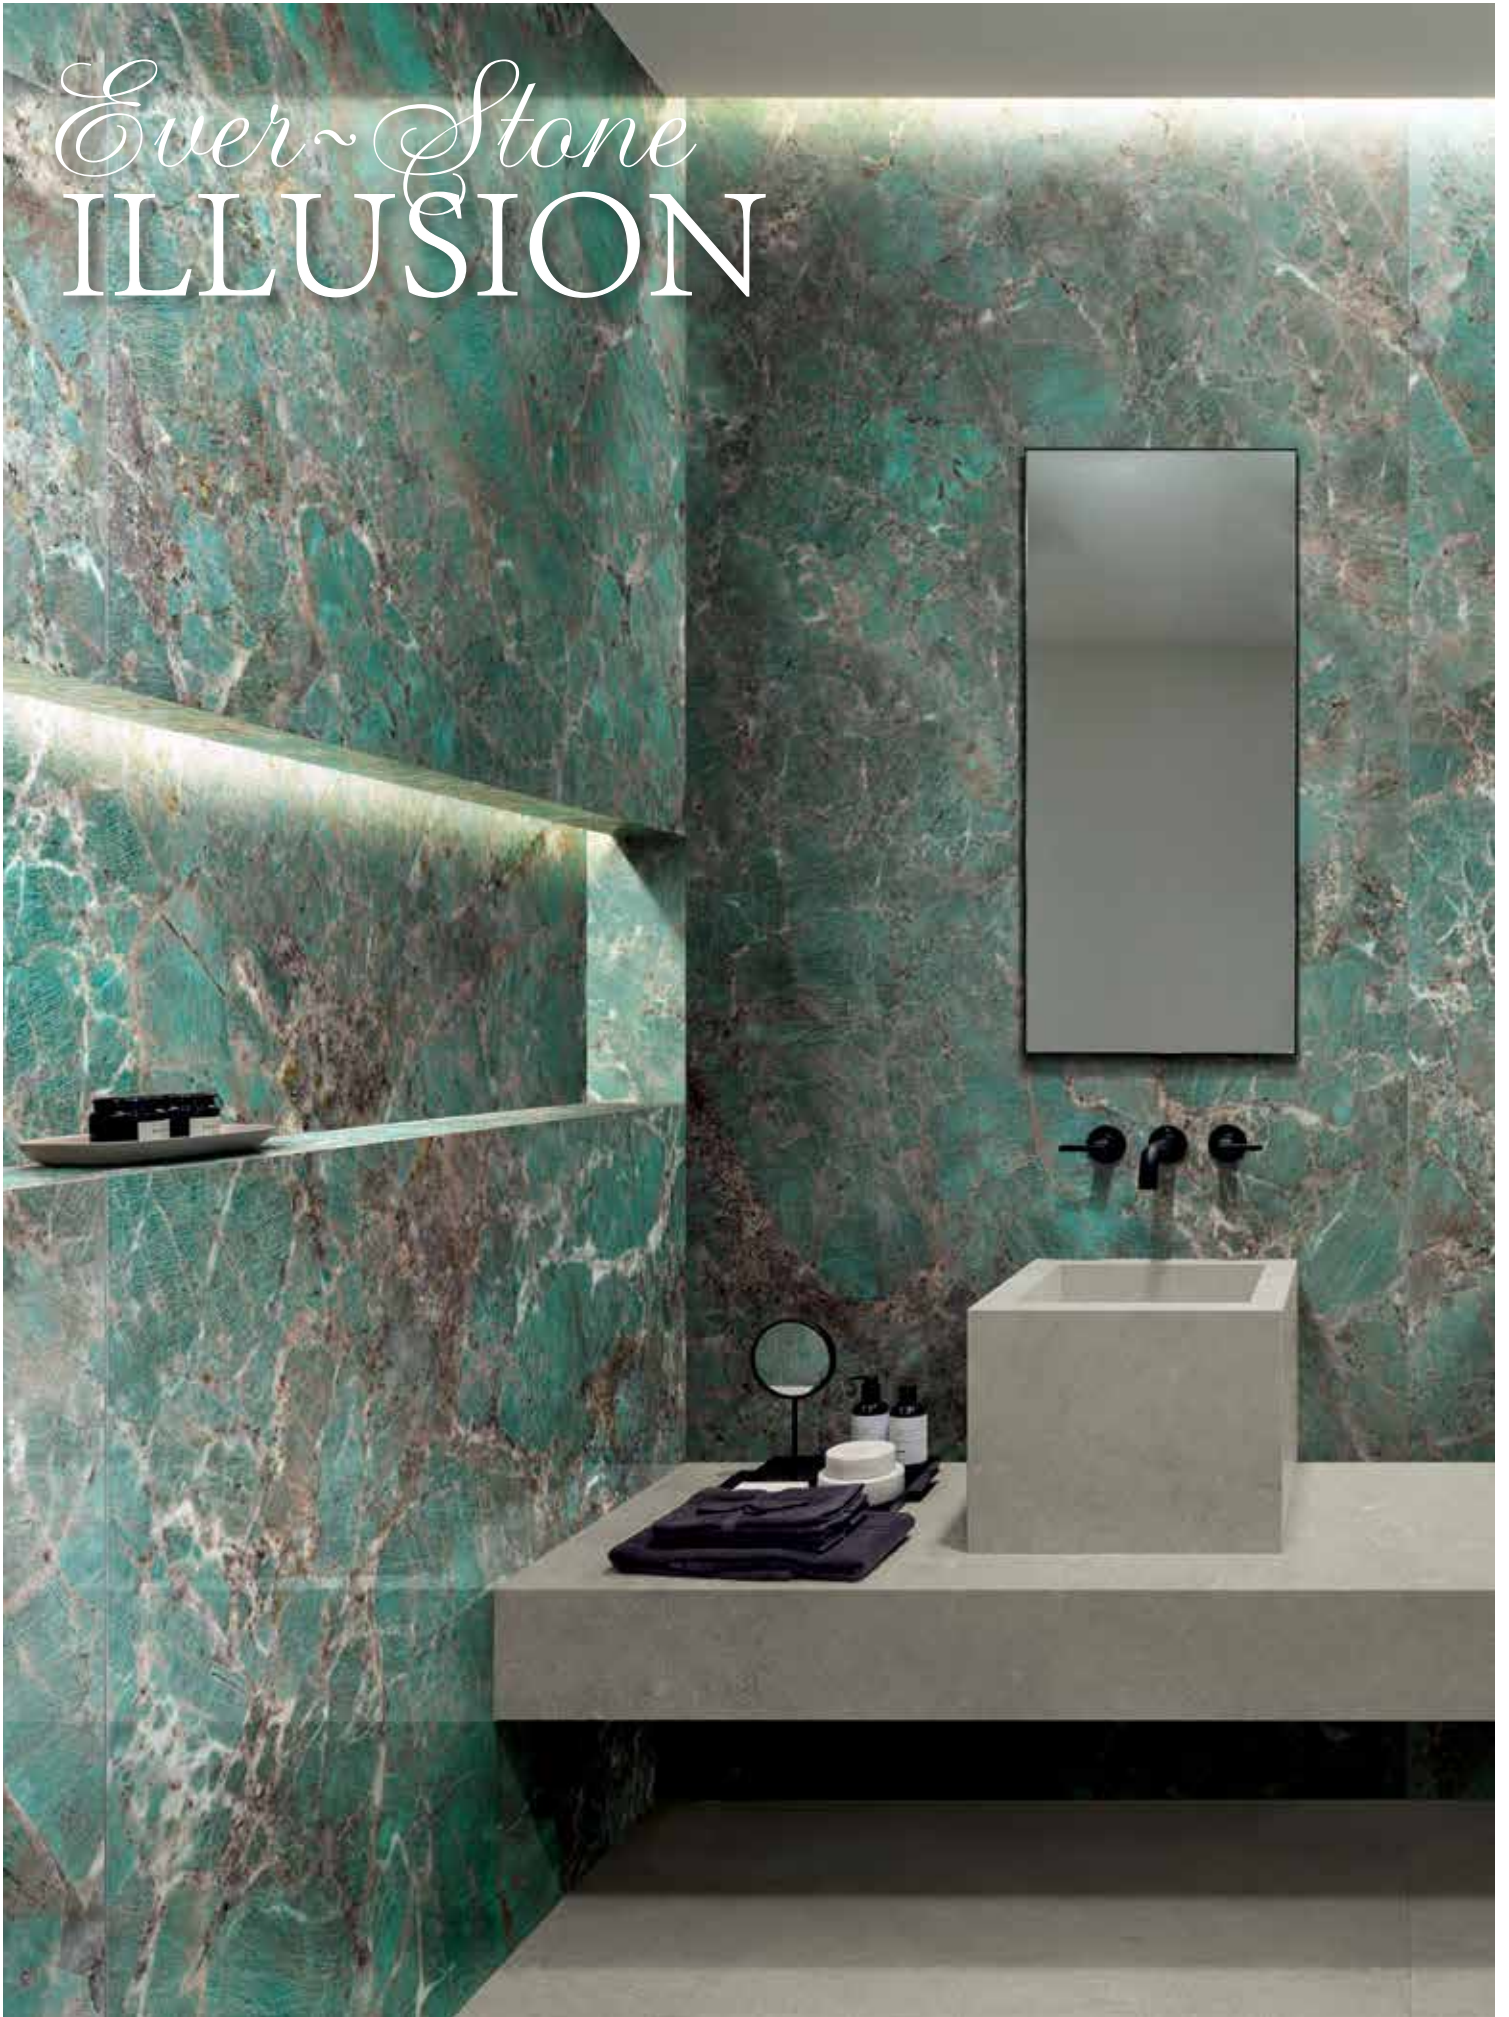

Ever~Stone ILLUSION

24"x48" (60x120cm) Tiles

6mm thickness | Polished Finish | Rectified Edge | 20 faces*

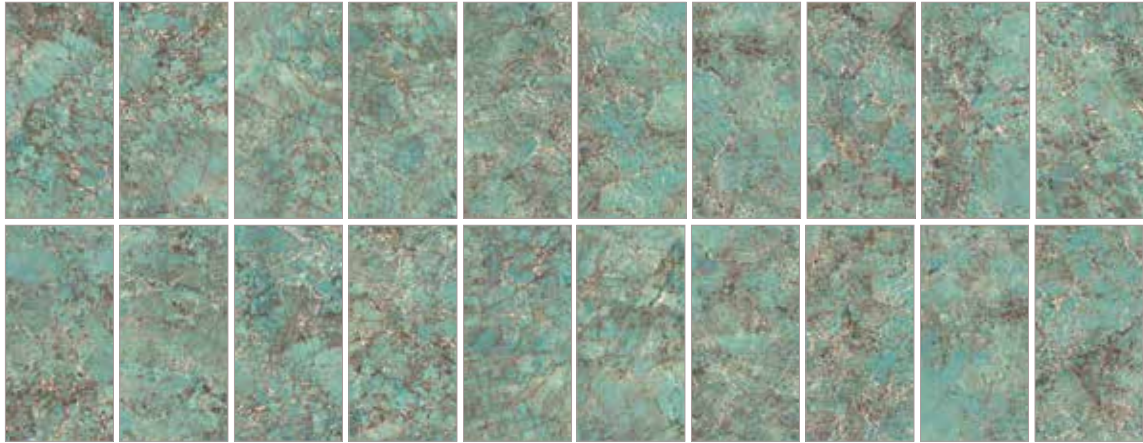

*faces are shown for visual variety. they are not intended for individual selection.

MAIEVIL2448L

Ever~Stone ILLUSION

48"x96" (120x240cm) Slabs


6mm thickness | Polished Finish | Rectified Edge | 8 faces*



*faces are shown for visual variety. they are not intended for individual selection.

HRREVIL1/4L


Ever~Stone
SODALITE

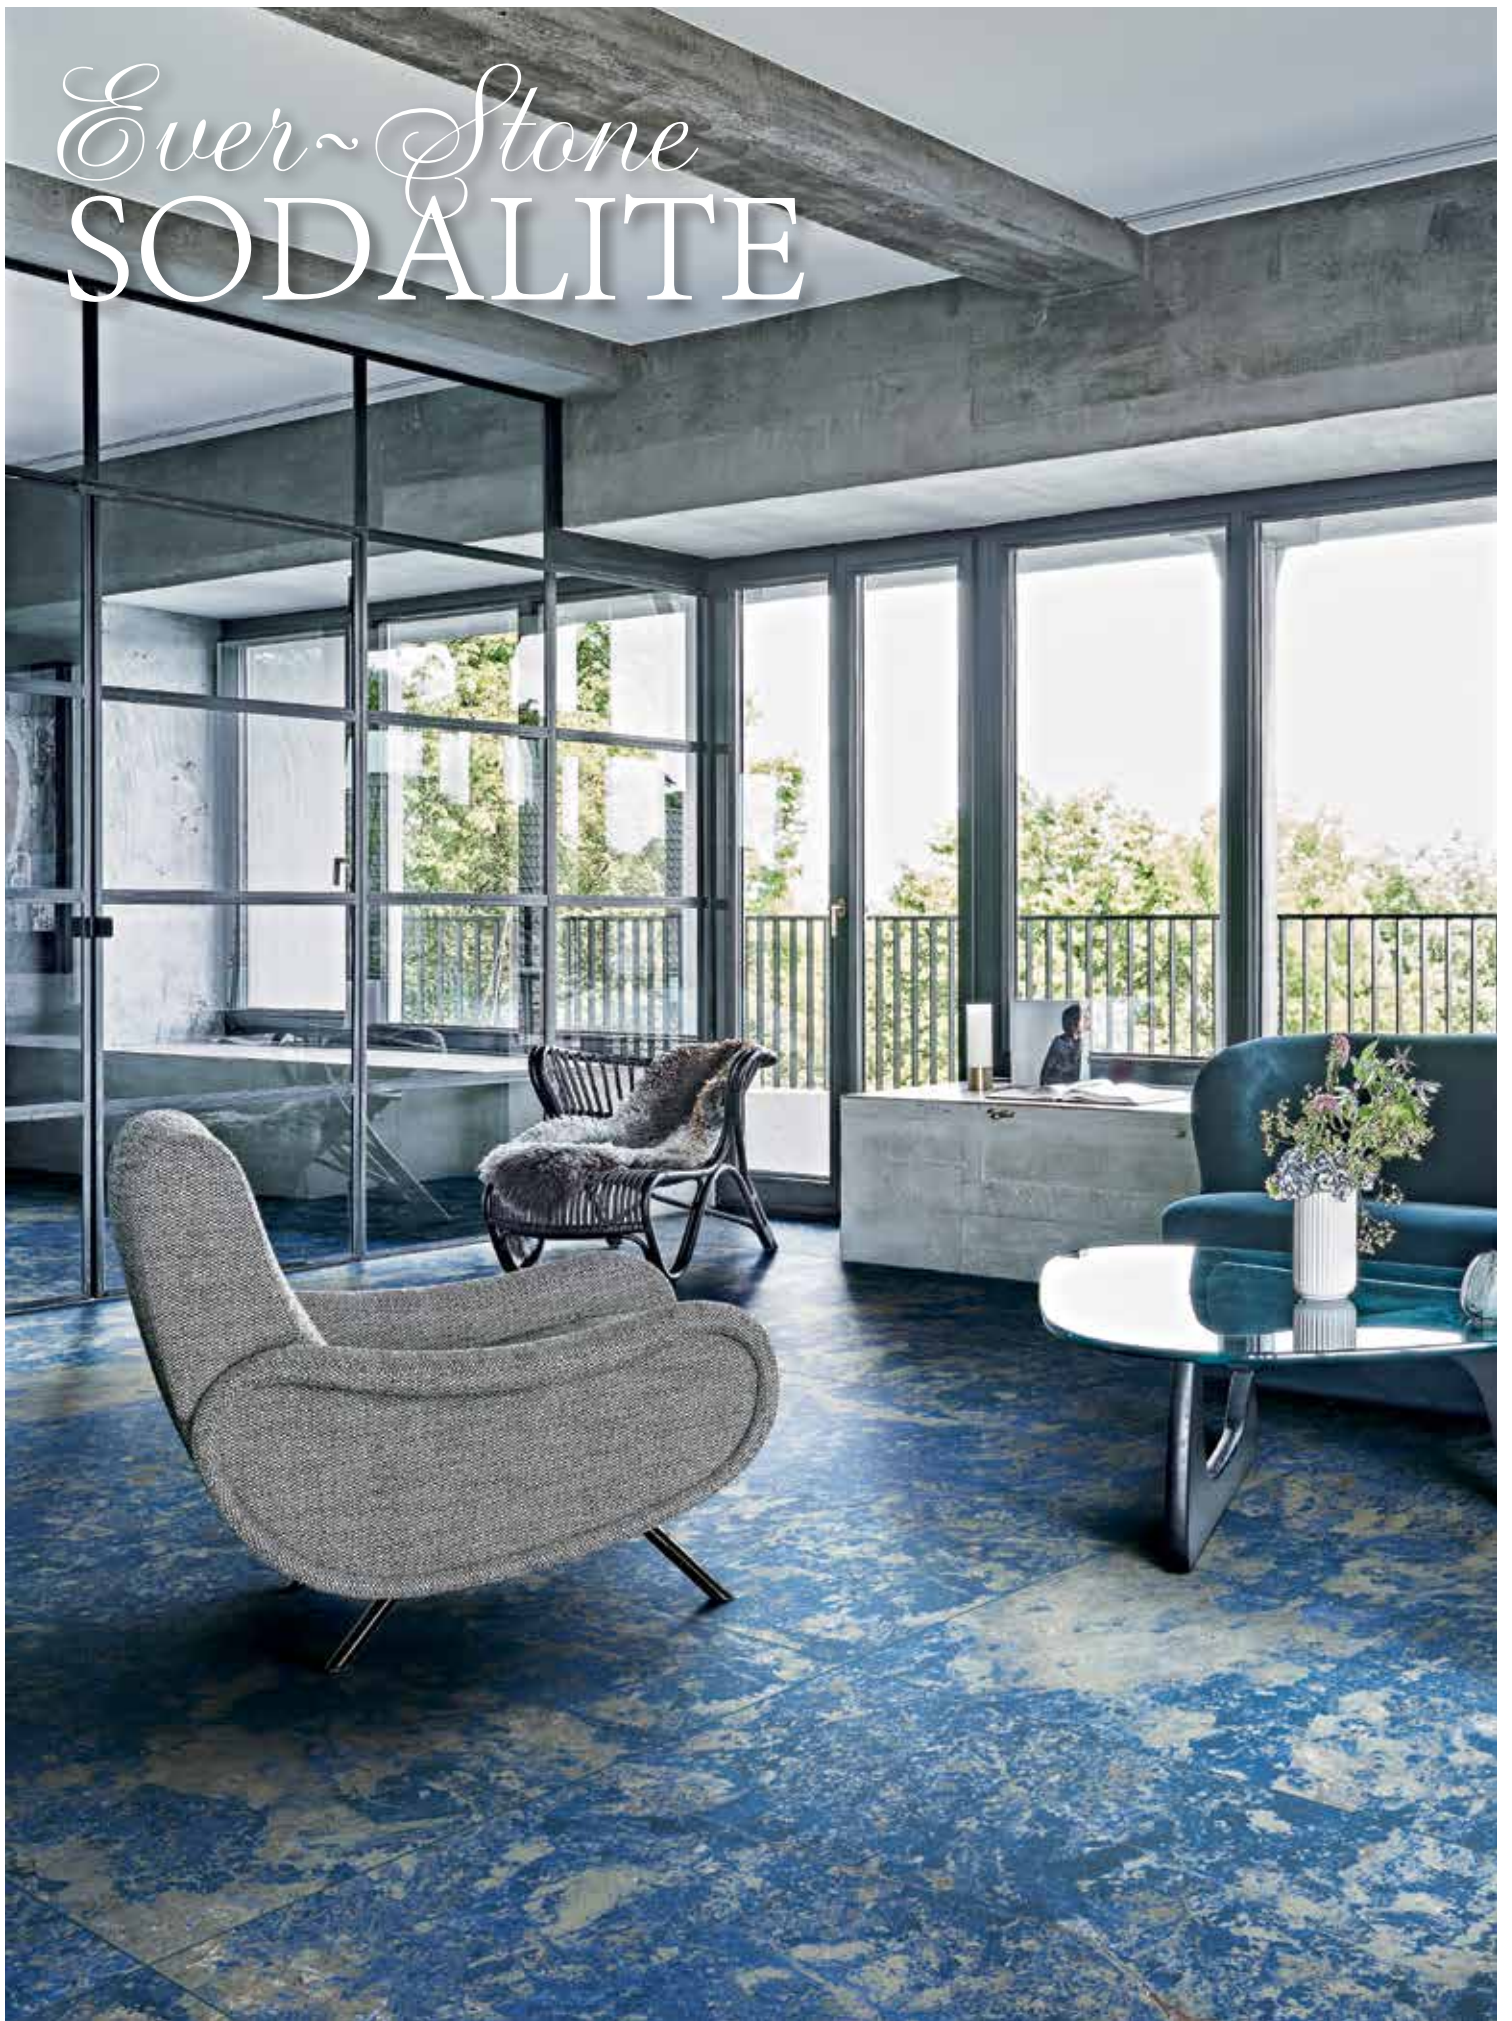

Ever~Stone SODALITE

24"x48" (60x120cm) Tiles

6mm thickness | Polished Finish | Rectified Edge | 20 faces*

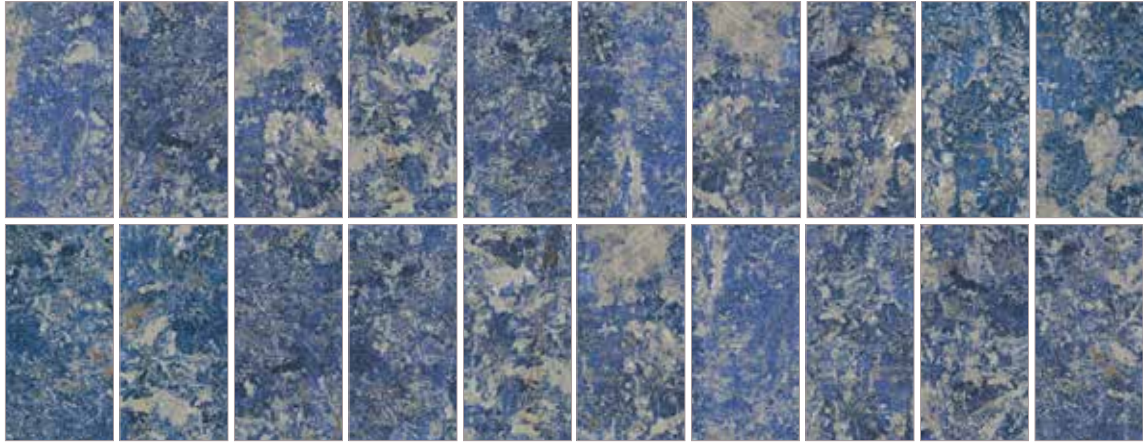


*faces are shown for visual variety. they are not intended for individual selection.

MAIEVSO2448L

Ever~Stone SODALITE

48"x96" (120x240cm) Slabs

6mm thickness | Polished Finish | Rectified Edge | 5 faces*

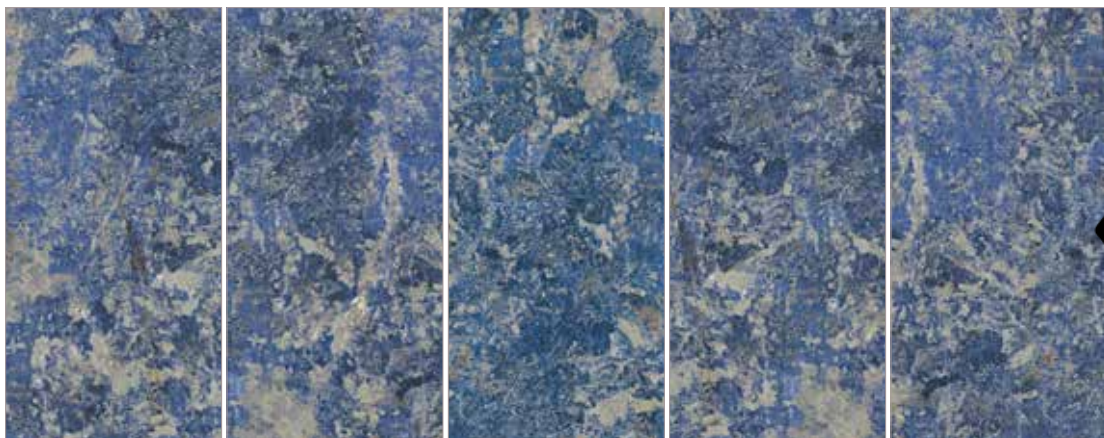

*faces are shown for visual variety. they are not intended for individual selection.

HRREVS01/4L

Ever~Stone
STATUARIO



Ever~Stone STATUARIO

24"x48" (60x120cm) Tiles

6mm thickness | Polished + Matte Finishes | Rectified Edge | 20 faces*



*faces are shown for visual variety. they are not intended for individual selection.

MAIEVST2448 (M)
MAIEVST2448L (P)

Ever~Stone STATUARIO

48"x96" (120x240cm) Slabs


6mm thickness | Polished + Matte Finishes | Rectified Edge | 6 faces*



*faces are shown for visual variety. they are not intended for individual selection.

HRREVCST1/4 (M)
HRREVST1/4L (P)


Ever~Stone
SYMPHONY

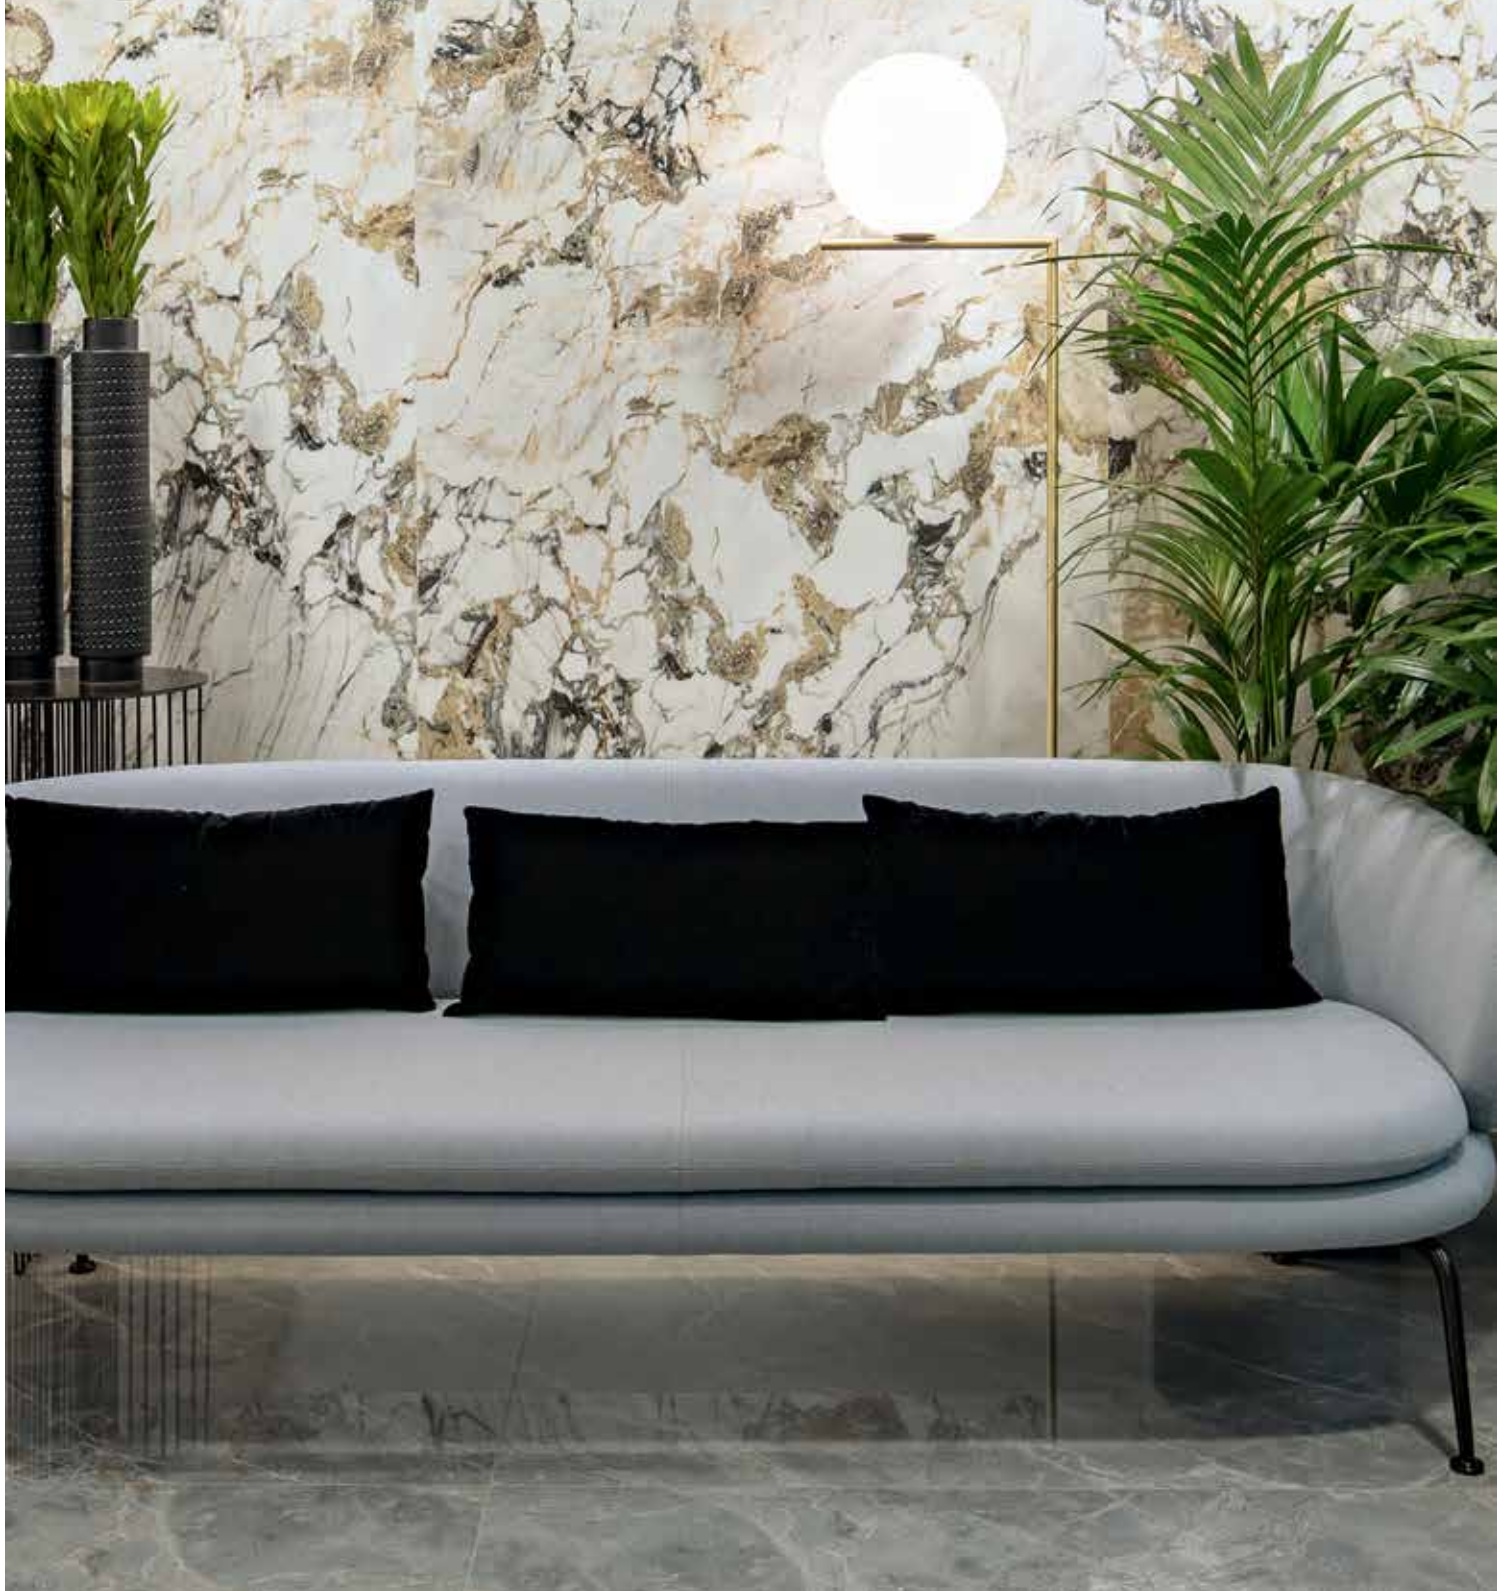

Ever~Stone SYMPHONY

24"x48" (60x120cm) Tiles

6mm thickness | Polished Finish | Rectified Edge | 20 faces*

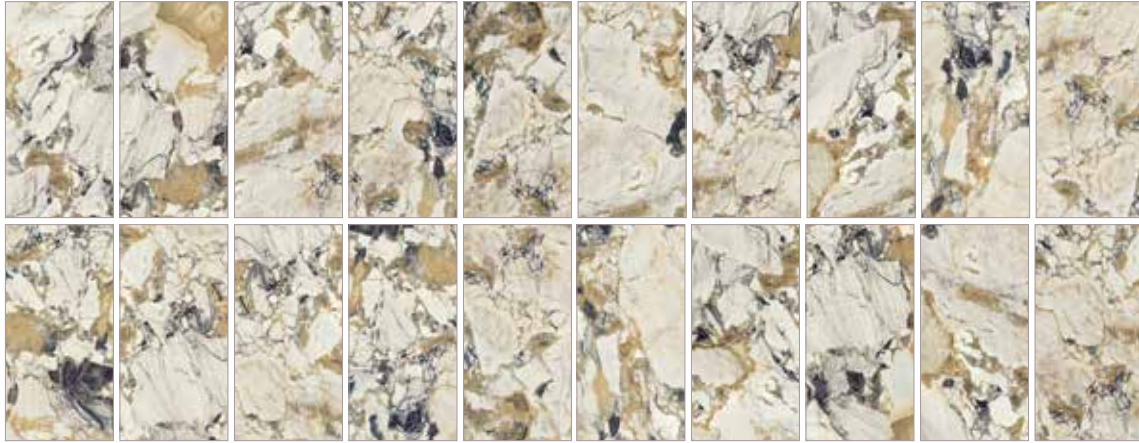


*faces are shown for visual variety. they are not intended for individual selection.

MAIEVSY2448L

Ever~Stone SYMPHONY

48"x96" (120x240cm) Slabs


6mm thickness | Polished Finish | Rectified Edge | 5 faces*

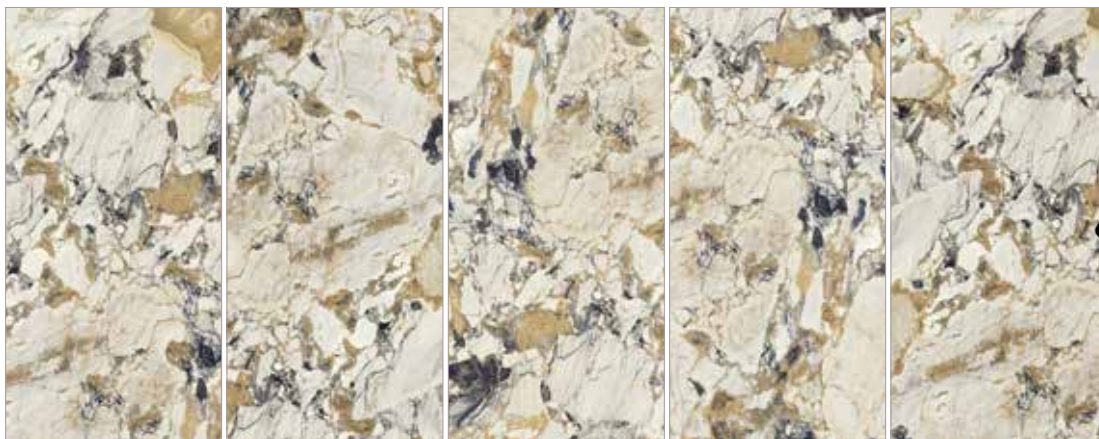

*faces are shown for visual variety. they are not intended for individual selection.

HRREVSY1/4L

Ever~Stone
TROPICAL

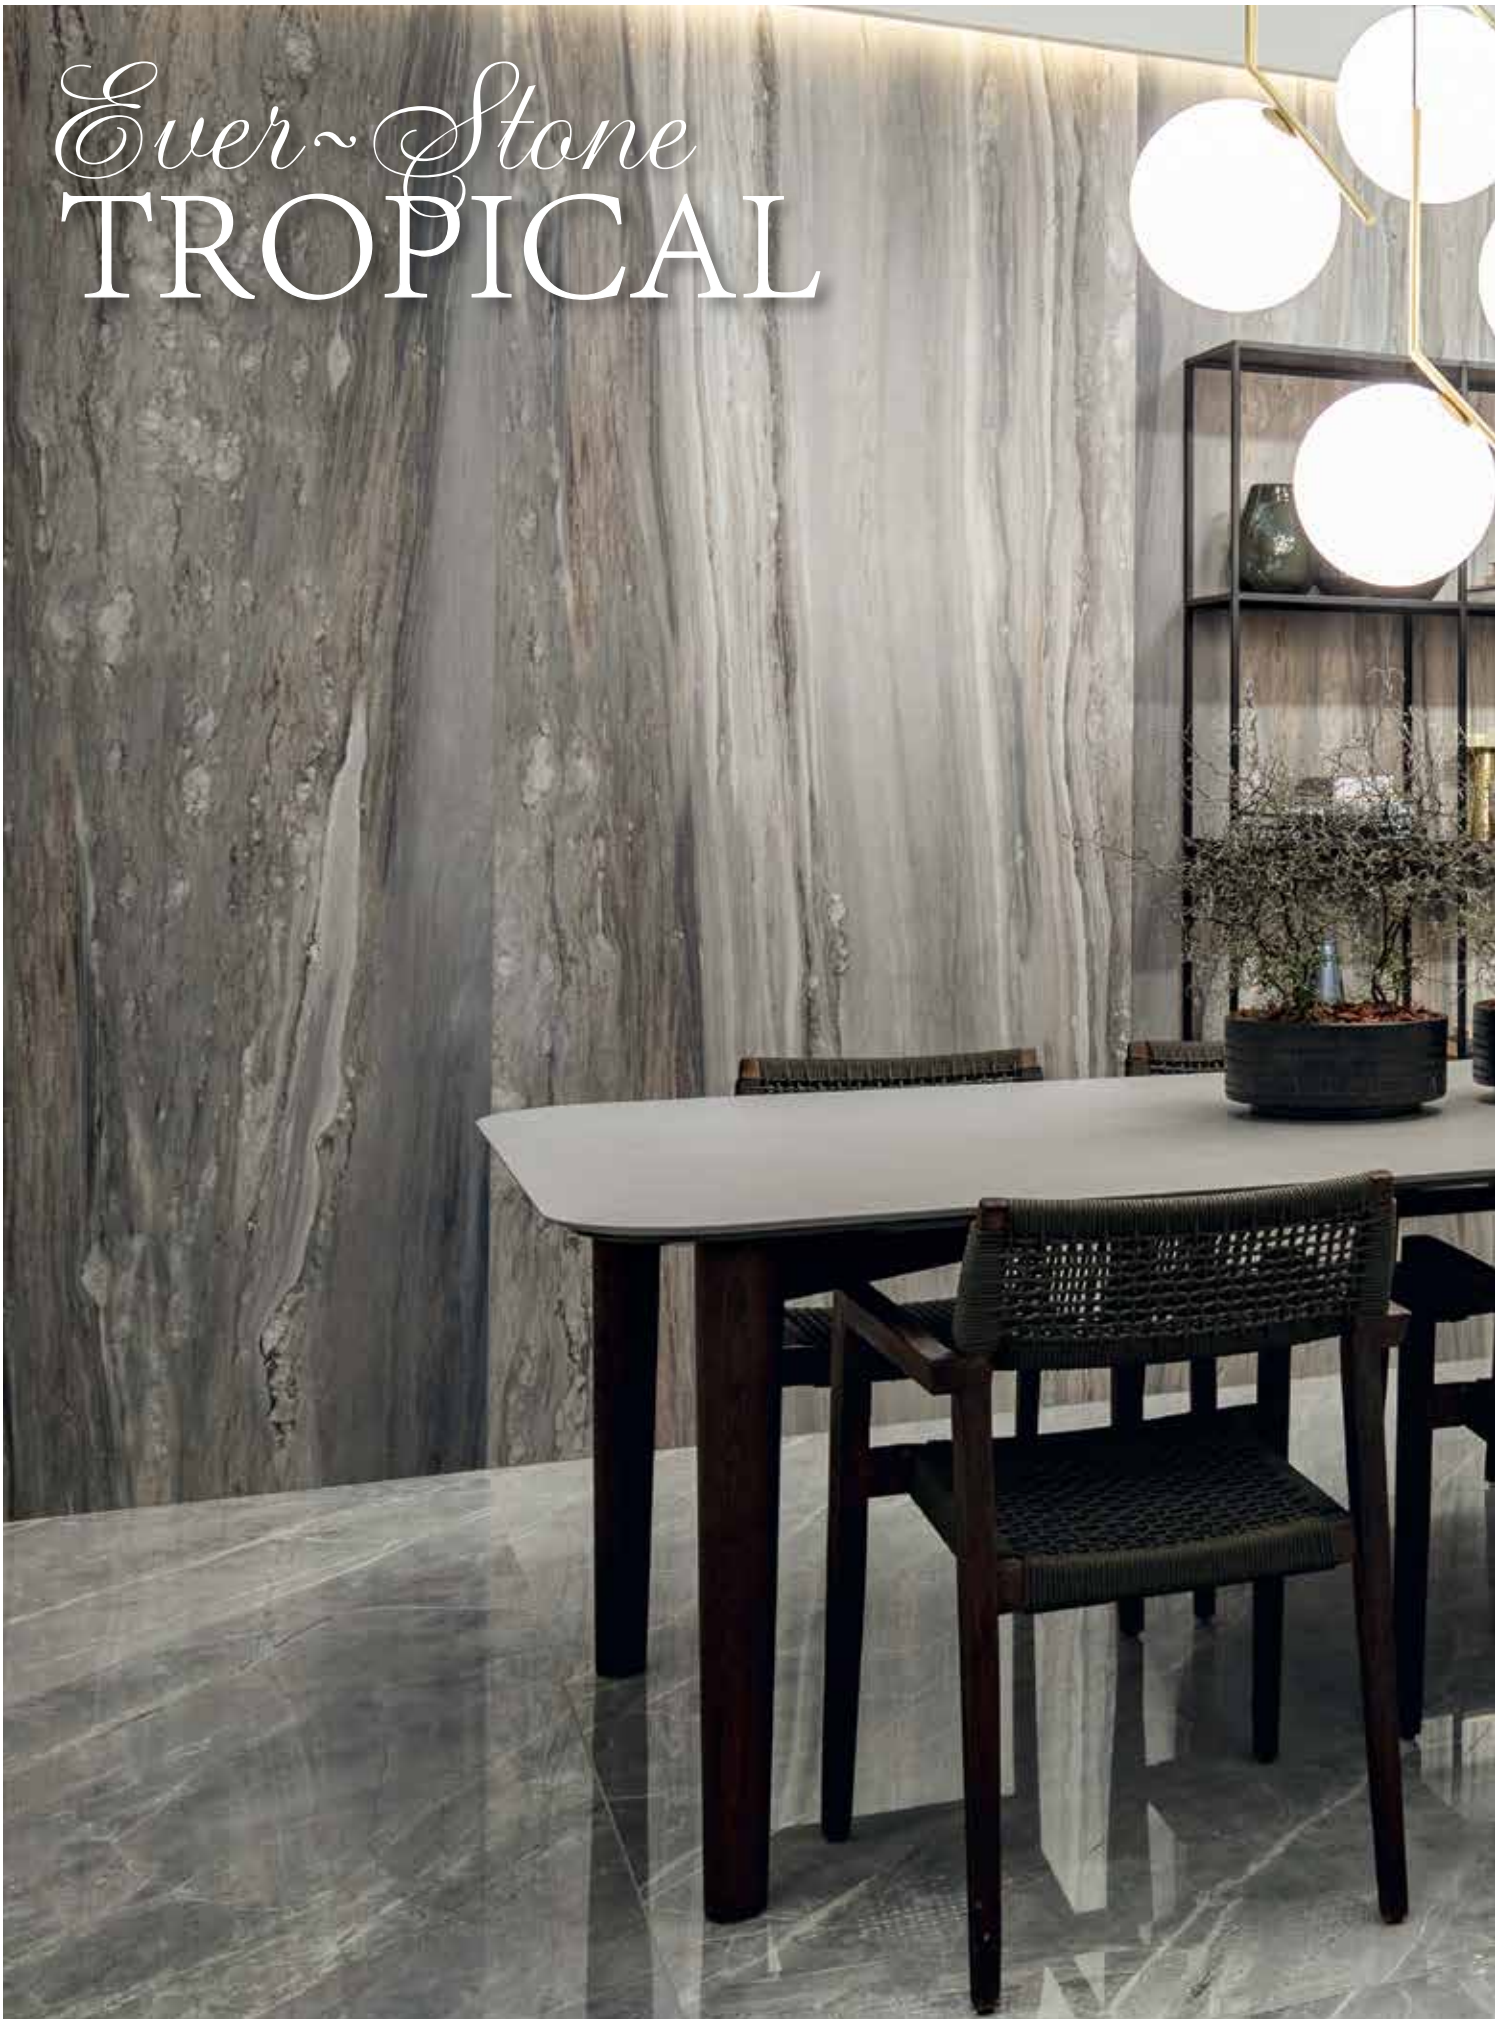

Ever~Stone TROPICAL

24"x48" (60x120cm) Tiles

6mm thickness | Polished Finish | Rectified Edge | 20 faces*



*faces are shown for visual variety. they are not intended for individual selection.

MAIEVTR2448L

Ever~Stone TROPICAL

48"x96" (120x240cm) Slabs

6mm thickness | Polished Finish | Rectified Edge | 6 faces*



*faces are shown for visual variety. they are not intended for individual selection.

HRREVTR1/4L

Ever~Stone SPECIAL ORDER SIZES

CALACATTA GOLD STATUARIO	SYMPHONY ILLUSION	TROPICAL	SODALITE
160x320cm / 63"x126" 160x160cm / 63"x63" 120x280cm / 48"x110" 120x120cm / 48"x48" 80x240cm / 32"x96" 80x80cm / 32"x32"	120x120cm / 48"x48"	160x320cm / 63"x126" 160x160cm / 63"x63" 120x280cm / 48"x110" 120x120cm / 48"x48"	120x280cm / 48"x110" 120x120cm / 48"x48"





Suggested Applications

Floor Wall Residential Light Commercial Heavy Commercial Exterior Pools

*Wear can vary greatly. please consult with a professional.

Installation Suggestions

Plank Installation* Modular Setting Joint Size

*Install the offset the width of the plank. For professional installation, the use of leveling spacers for all plank and rectangular (ie. 12x24) format tiles is recommended.

EDGE: Straight/Pressed Rustic Rectified

FINISH: Matte Polished Structured Honed Semi-Polished

Porcelain Type

through-body color-bodied glazed unglazed double-loaded other

Shade Variation

V1 Uniform Appearance V2 Slight Variation V3 Moderate Variation V4 Substantial Variation

THICKNESS: 6mm # OF FACES: 20 = 24x48, 5-8 = 48x96

Slip Resistance

DCOF	Values	Applications
<input checked="" type="checkbox"/> >.42	0.42	Recommended Standard DCOF value for wet/dry commercial flooring
<input type="checkbox"/> >.65	0.65	Recommended Standard DCOF value for ADA ramps

DIN 51130 *R9: Industry Standard/ADA Requirements **R11: Recommended For Exteriors

R9* (3-10°) R10 (10-19°) R11** (19-27°) R12 (27-35°) R13 (>35°)

DIN 51097

Class	Typical Applications	Critical Angle
<input checked="" type="checkbox"/> A	Barefoot, but mainly dry aisles and walkways, dry changing areas	≥12°
<input checked="" type="checkbox"/> B	Shower rooms, pool surrounds, wet changing areas, disinfectant spray areas (plus all Class A areas)	≥18°
<input type="checkbox"/> C	Areas constantly under water, e.g. steps into pools, foot baths, inclined pool surrounds, jacuzzis (plus all Class A&B areas)	≥24°

ASTM C-1028
 ANSI A137.1
 DIN 51097/51130

Scratch Resistance

MINERAL

1. Talc (Talc)	6. Microline (Glass, Glazed Tile)
2. Gypsum (Fingernail)	7. Quartz (Unglazed Porcelain)
3. Calcite (Penny)	8. Topaz (Granite)
4. Flourite (Some Marbles)	9. Corundum (Ruby)
5. Apatite (Knife Blade)	10. Diamond (Diamond)

Industry standard ≤175mm²

MOH'S SCALE
 UNI EN ISO
 10545.6

3

Wear Resistance

PEI RATING
 UNI EN ISO
 10545.7

- Class 1: Walls only
 - Class 2: Residential floors w/minimal abrasive traffic
 - Class 3: Residential interiors/light commercial traffic
 - Class 4: Medium commercial applications
 - Class 5: All commercial applications/heavy traffic
- *Wear can vary greatly. please consult with a professional.

Stain Resistance

- 5: Removed after 5 minutes (hot water running)
- 4: Removed by manual cleaning (weak detergent)
- 3: Removed by mechanical cleaning (strong detergent)
- 2: Removed by immersion (24 hrs in suitable solvent)
- 1: Stain not removed

ASTM C1378-04
 UNI EN ISO
 10545.14

4

Water Absorption

ASTM C-373
 UNI EN ISO
 10545.3

<input checked="" type="checkbox"/> Absorbs 0-.5%	<input type="checkbox"/> Absorbs .5-3%	<input type="checkbox"/> Absorbs 3-7%	<input type="checkbox"/> Absorbs 7% +
Impervious Interior/Exterior Frost Resistant	Vitreous Interior/Exterior Frost Resistant	Semi-Vitreous Indoor Use Only	Non-Vitreous Indoor Use Only

Breaking Strength

ASTM C648
 UNI EN ISO
 10545.4

Industry standard should be greater than 250 lbs or 50 N/MM²

Facial Dimension

ASTM c499-09
 UNI EN ISO
 10545.02

	Standard	Tolerance	Result
flatness	±5mm	±.5%	<input type="checkbox"/>
thickness	±6mm	±.5%	<input type="checkbox"/>
straightness	±4.5mm	±.5%	<input type="checkbox"/>
squareness	±5.4mm	±.6%	<input type="checkbox"/>
sides L/W	±1.1mm ±4.5mm	±.5%	<input type="checkbox"/>

Chemical Resistance

ASTM C650
 UNI EN ISO
 10545.13

Allowances for:

result

Acid

Bases

Chemicals

Leed Information



REQUIREMENTS
 FOR COMMERCIAL
 INTERIORS/NEW
 CONSTRUCTION

Sustainable Sites	1 Point	Materials & Resources	1 Point	2 Points
Site selection	1 Point	M&R CREDIT 2	1 Point	2 Points
SS CREDIT 1		Construction Waste Management: Recycling salvaged construction waste in to new reusable materials.	50% <input type="checkbox"/>	70% <input checked="" type="checkbox"/>
Heat Island Effect-non roof	<input type="checkbox"/>	M&R CREDIT 4.1-4.2	1 Point	2 Points
Material with a solar reflectant index of at least 29.		Recycled Content: The sum of post consumer plus 1/2 of the pre consumer reps at least 10-20% of total value of materials.	10% <input type="checkbox"/>	20% <input checked="" type="checkbox"/>
Energy & Atmosphere	1 Point	M&R CREDIT 5	1 Point	2 Points
EA CREDIT 4		Regional Materials: Materials manufactured within 500 miles of the project site.	10% <input type="checkbox"/>	20% <input type="checkbox"/>
Green Power: Products that optimize energy performance for floors and walls using thermal conductivity. BTU-FT	<input type="checkbox"/>	Innovation in Design	1-5 Points	
Indoor Environmental Quality	1 Point	ID CREDIT 1		
Low-Emitting Materials-Flooring Systems		Innovation in Design		
IEQ CREDIT 3.1-7		Measurable exemplary environmental performance.		<input checked="" type="checkbox"/>
Green Cleaning: Reducing occupants exposure to hazardous cleaning chemicals.	<input type="checkbox"/>			
IEQ CREDIT 4.1				
Low Emitting Adhesives: Products less than 65 G/L VOC	<input type="checkbox"/>			
IEQ CREDIT 4.3				
Low Emitting Materials: Flooring systems.	<input checked="" type="checkbox"/>			

Type: Porcelain Tile + Slabs

Product Line: Ever-Stone

The marketing name for this product is property of Cancos Tile & Stone. This same product may be marketed under different names.