

Olother of Pearl—



GLAMPWHPEN

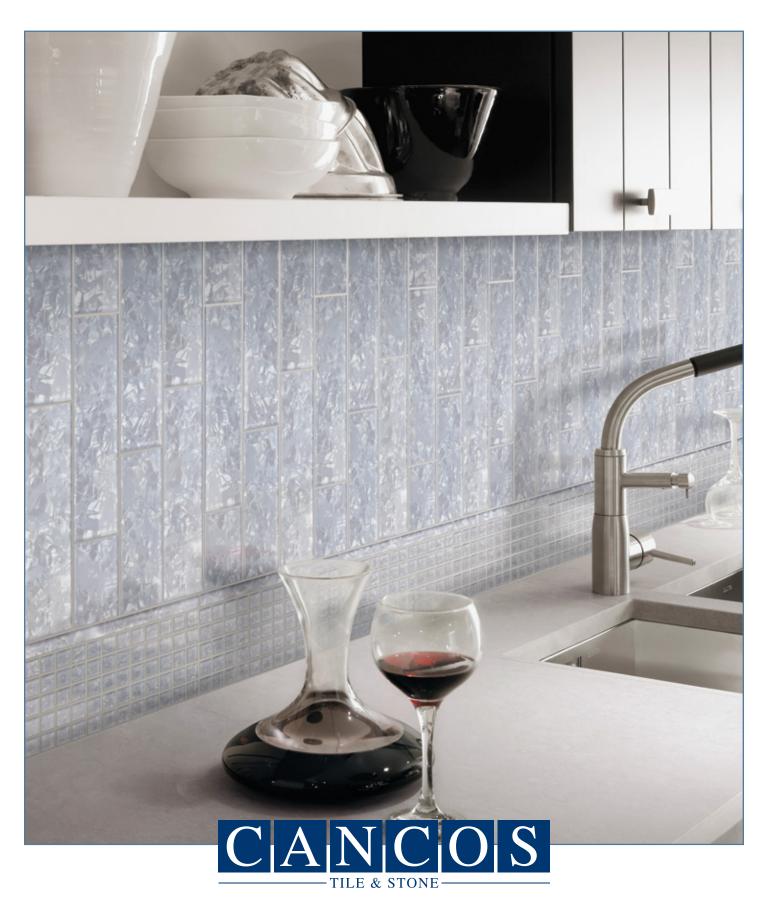

GLAMPWH312



3x12

GLAMPWH11



1x1 mosaic

APPLICATION	INTERIOR			EXTERIOR		
	R	LC	НС	R	LC	НС
Walls/Backsplashes	Χ	X	X			
Floors						
Submerged Areas*	Χ	Χ	Х			
Wet Areas	Χ	Χ	X			

r areas submerged in water, it is strictly recommended to use epo both adhesive and grout.

R - Residential LC - L

LC - Light Commercial

HC - Heavy Commercial

Mortar X X
Grout X X

CB - Cement Base EB - Epoxy Base

Glass Tile may be susceptible to scratching in handling and installation, as well as use. Expect variation of color from production run to production run. Please refer to the TCNA HANDBOOK for more specific information regarding installation.

MAINTENANCE

Use a non-abrasive cloth and neutral detergents for cleaning. Avoid acid detergents, chemicals and solvents.