

Shell stone




Inspired by Nature, Made Possible by...

CANCOS

TILE AND STONE



GLA SSAB SMBRK

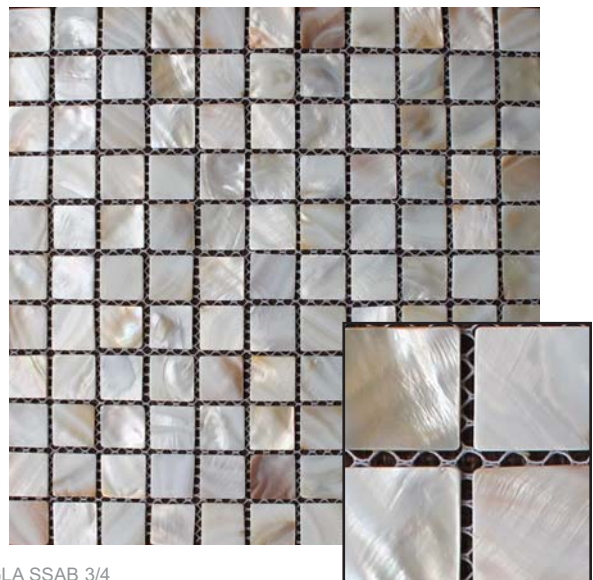

GLA SSAB 3/4



GLA SSAB OVALS

INSTALLATION AND MAINTENANCE INSTRUCTION FOR STONE, GLASS & SHELL BLENDS

Glass tile may be susceptible to scratching in handling and installation, as well as use.
Expect variation of color from production run to production run.

Installation

Only use adhesives with high adhesion and elasticity which are especially recommended for installing glass . Make sure to get complete coverage. All substrates should be properly reinforced to be sure there is no movement. For mortar installations, the mortar bed has to be cured (less than 2% humidity) and has to have proper reinforcing.

Please refer to the TCNA HANDBOOK for more specific information regarding installation of glass tile.

Adhesives & Grouting

Any type of cement based adhesive & grout is suitable. For this product we recommend white setting material to set shellstones in. Thin set can act as grout as well

Sealing

The product can be sealed with Fila's MP90 or a similar product as recommended by the manufacturer. Before applying the sealer to the installation, test it on a small area.

Maintenance

Use a non-abrasive cloth and neutral detergents for cleaning. Avoid acid detergents, chemicals and solvents.

Usage

It is recommended for interior walls and can be used for shower walls.
Light traffic flooring only



For Information and samples
1-800-3-CANCOS
customerservice@cancos.com